



STYLE MCVR84 COVER SEALS

MCVR84 urethane cover seals are designed to replace O-rings for most hydraulic applications, eliminating common problems such as twisting and tearing as well as the need for a backup ring at high pressures. Cover seals may also be used as a double acting seal in many hydraulic applications previously using a conventional O-ring to provide better wear characteristics and greater resistance to extrusion.

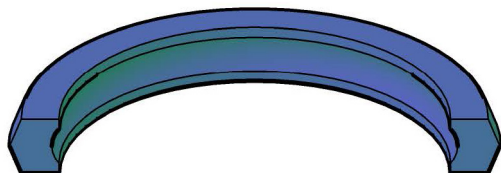

SEAL INFORMATION	
MATERIAL	95A Urethane
TEMPERATURE RANGE	-22° F / +212° F
PRESSURE RANGE	0 to 8700 PSI
SPEED	STATIC TO 3 FT/SEC

PART NUMBER	J (H8) (Nominal OD)	H (h8) (Nominal ID)	D (+0.25/-0.00) Groove Width	LIST PRICE
MCVR84-030	30	25.4	3.9	\$2.77
MCVR84-035	35	30.4	3.9	\$2.98
MCVR84-040	40	33.5	4.8	\$3.20
MCVR84-045	45	39.5	4.5	\$3.84
MCVR84-050	50	44.4	6.2	\$4.16
MCVR84-060	60	52.2	5.8	\$4.37
MCVR84-070	70	64.4	6.2	\$4.59
MCVR84-075	75	69.6	6.5	\$4.91
MCVR84-080	80	74.6	6.5	\$5.55
MCVR84-085	85	80.8	5	\$5.55
MCVR84-090	90	80.1	7.8	\$5.55
MCVR84-095	95.5	87.7	5.8	\$5.65
MCVR84-100	100	90	7.8	\$5.76
MCVR84-105	105	95.1	7.8	\$6.93
MCVR84-110	110	101.4	9	\$7.25
MCVR84-120	120	112	6.5	\$7.25
MCVR84-125	125	116.4	9	\$7.47
MCVR84-130	130	123.7	5.2	\$8.27
MCVR84-135	135	128	5.5	\$9.07
MCVR84-140	140	134.1	5.9	\$10.03
MCVR84-145	145	139.1	4.9	\$10.45
MCVR84-150	150	141.9	9.2	\$10.88
MCVR84-160	160	150	8.4	\$13.44
MCVR84-170	170	160	8.4	\$15.25
MCVR84-180	180	170	8.4	\$15.57
MCVR84-190	190	180	8.4	\$21.87
MCVR84-200	200	191.4	9	\$22.69