


STYLE MWRE SC WEAR RINGS

The style MWRE wear ring is molded from glass fiber reinforced polyetherimide—a high strength and heat resistant material. The OD surface features diagonal grooves which serve to retain fluid for added lubrication. These wear rings are commonly used within Caterpillar, John Deere, and Hitachi cylinders.

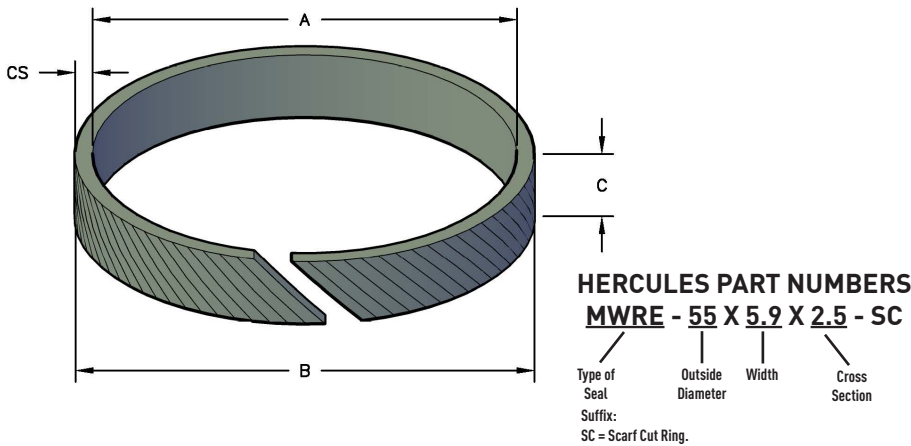

SEAL INFORMATION	
MATERIAL	POLYETHERIMINE GLASS FIBER
TEMPERATURE RANGE	-60 TO 335° F
SPEED	3 FT/SEC
TENSILE STRENGTH	18,100 PSI

PART NUMBER	A Nom. ID	B Nom. OD	C Nom. HT	Nom. Cross Section	LIST PRICE
MWRE-55X5.9X2.5-SC	50	55	5.9	2.5	\$6.52
MWRE-60X5.9X2.5-SC	55	60	5.9	2.5	\$6.52
MWRE-65X5.9X2.5-SC	60	65	5.9	2.5	\$6.67
MWRE-70X5.9X2.5-SC	65	70	5.9	2.5	\$6.67
MWRE-75X5.9X2.5-SC	70	75	5.9	2.5	\$6.81
MWRE-80X5.9X2.5-SC	75	80	5.9	2.5	\$6.81
MWRE-85X5.9X2.5-SC	80	85	5.9	2.5	\$6.96
MWRE-90X5.9X2.5-SC	85	90	5.9	2.5	\$6.81
MWRE-95X5.9X2.5-SC	90	95	5.9	2.5	\$6.81
MWRE-100X5.9X2.5-SC	95	100	5.9	2.5	\$7.11
MWRE-100X14.8X2.5-SC	95	100	14.8	2.5	\$9.63
MWRE-105X5.9X2.5-SC	100	105	5.9	2.5	\$7.26
MWRE-110X7.9X2.5-SC	105	110	7.9	2.5	\$7.41
MWRE-115X7.9X2.5-SC	110	115	7.9	2.5	\$7.41
MWRE-120X7.9X2.5-SC	115	120	7.9	2.5	\$7.56
MWRE-125X7.9X2.5-SC	120	125	7.9	2.5	\$7.56
MWRE-130X7.9X2.5-SC	125	130	7.9	2.5	\$7.78
MWRE-135X7.9X2.5-SC	130	135	7.9	2.5	\$7.78
MWRE-140X9.5X2.5-SC	135	140	9.5	2.5	\$10.37
MWRE-145X9.5X2.5-SC	140	145	9.5	2.5	\$11.11
MWRE-150X9.5X2.5-SC	145	150	9.5	2.5	\$11.85